
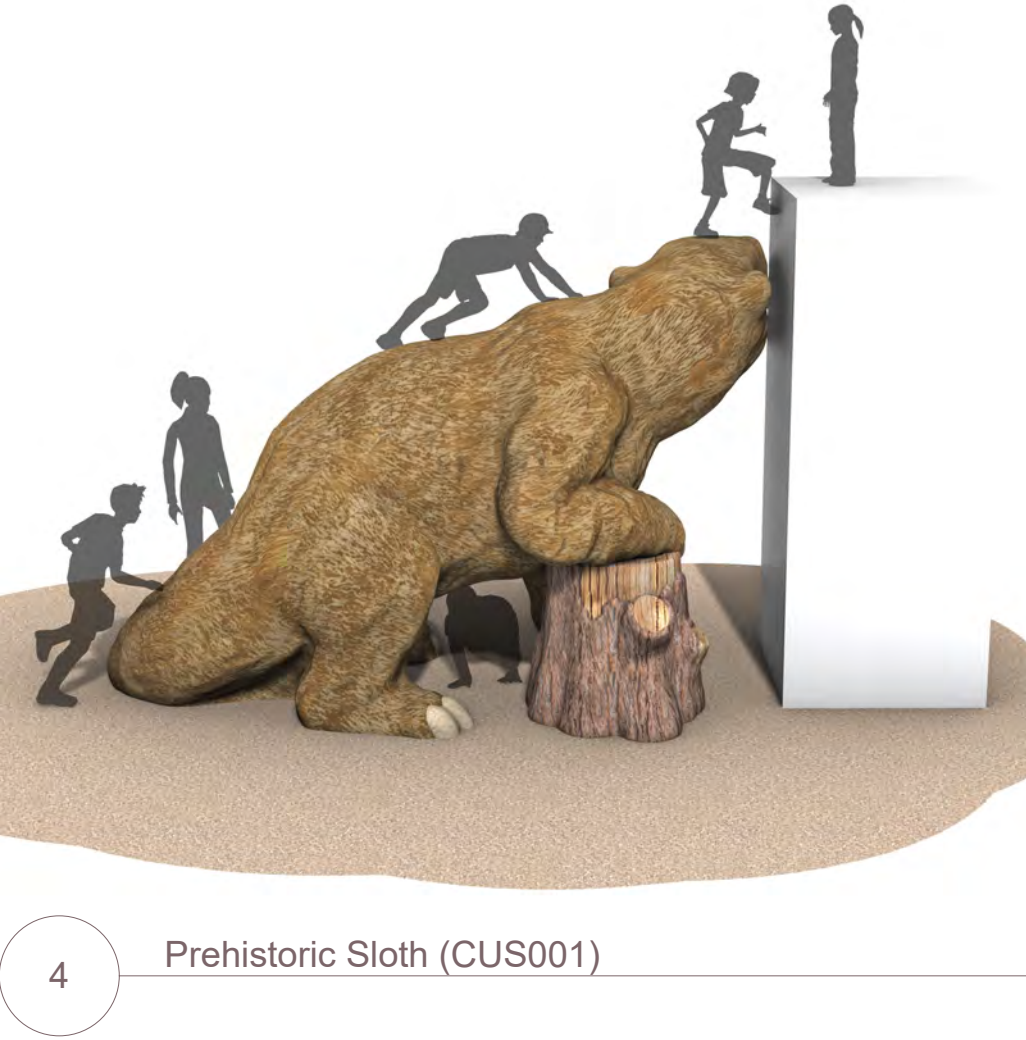
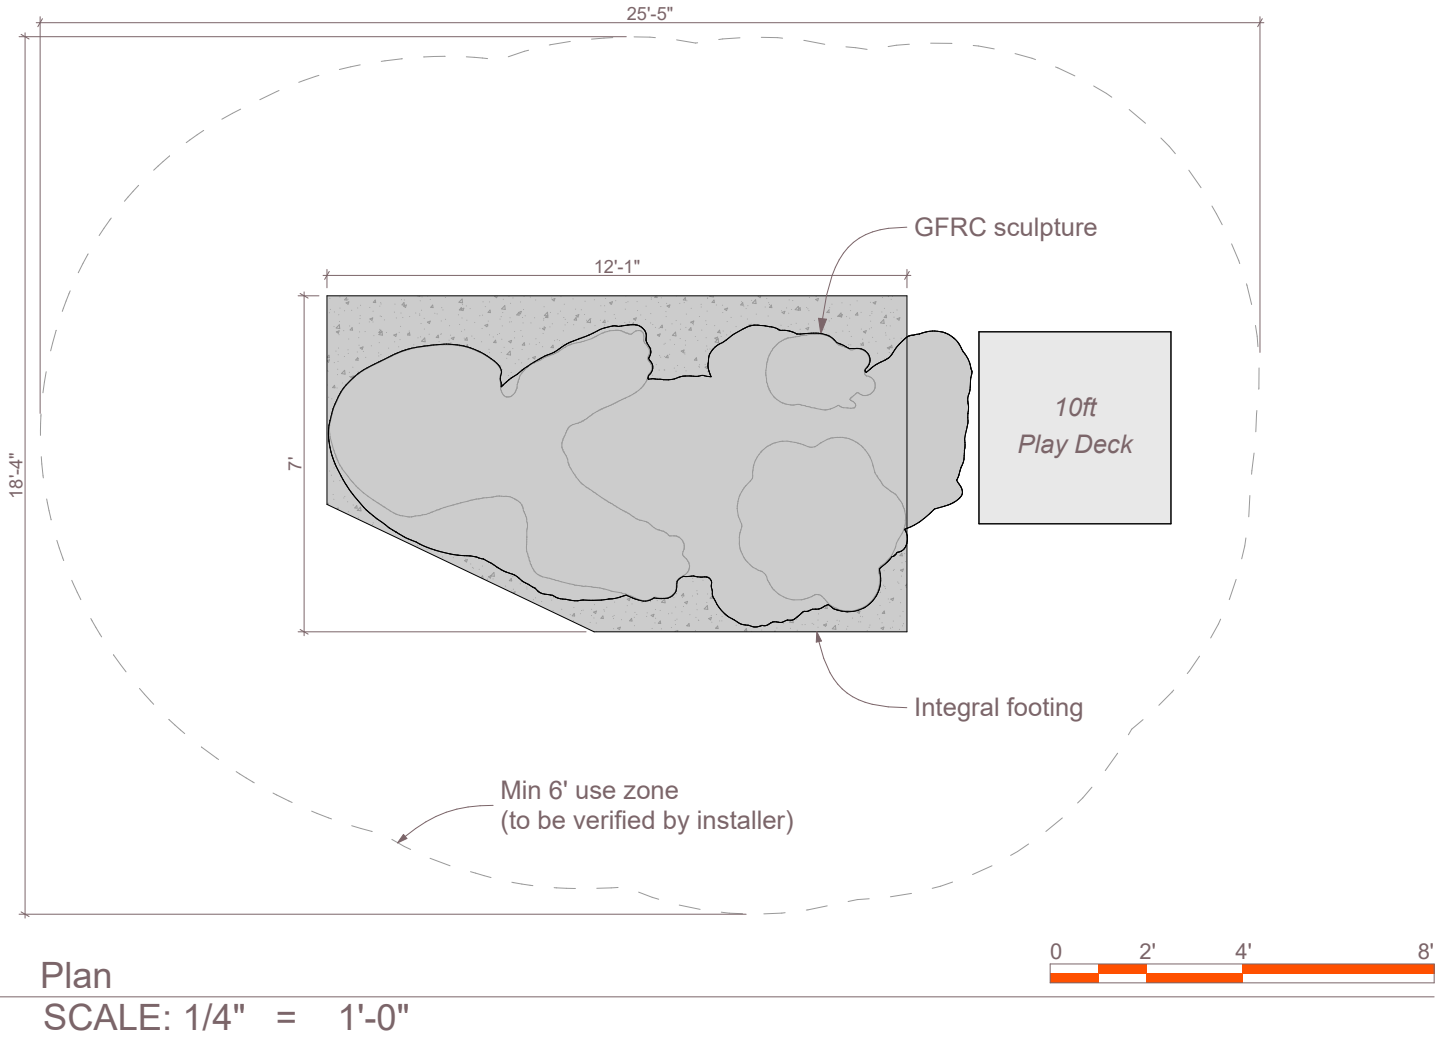


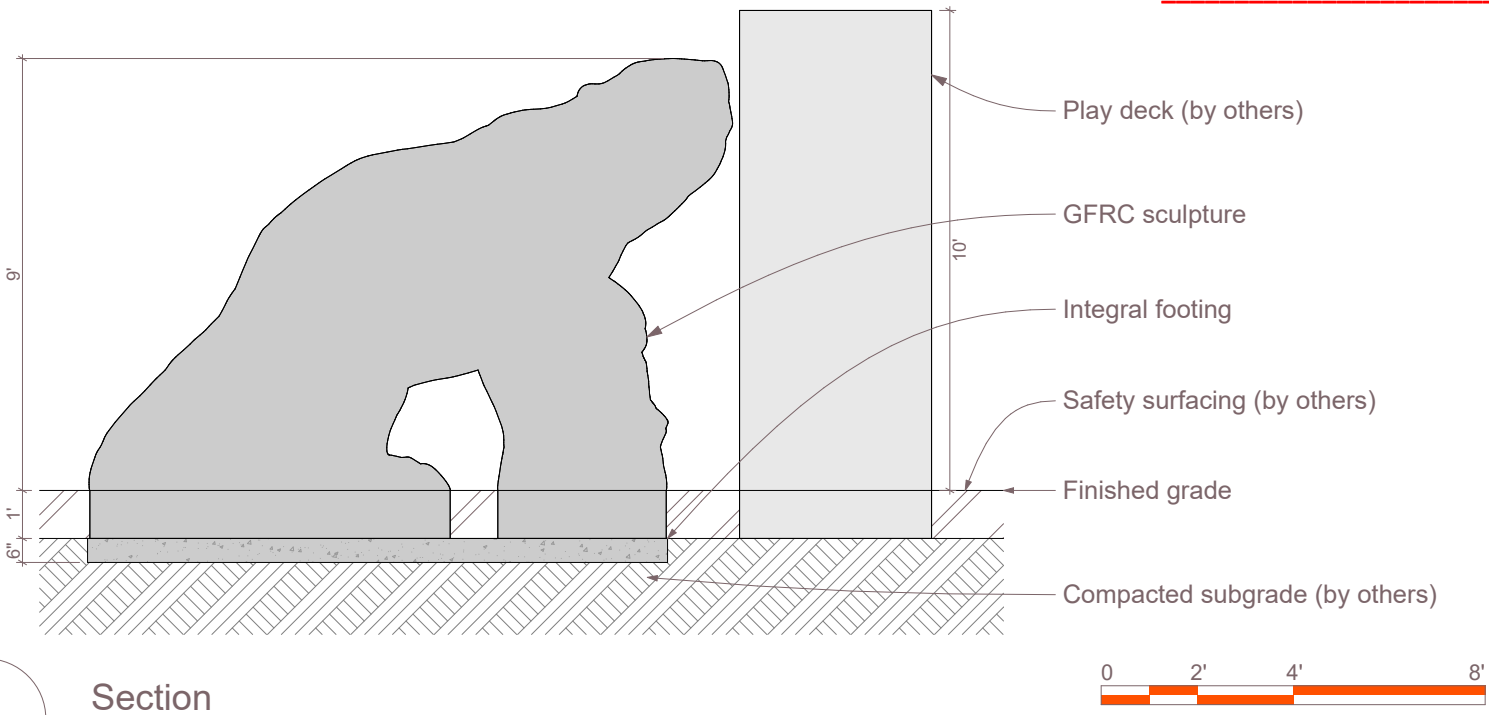

Thunder Junction
Phase Two
St. George, UT
Age Group: 5-12

100% CONSTRUCTION DRAWINGS

All IDS projects are designed to meet or exceed ASTM 1487. Please consult ASTM 1487 for required hazard warning and signage specifications. Not all equipment may be appropriate for all children. Supervision is required. ASTM compliant safety surfacing is required under and around all play equipment. The Americans with Disabilities Act (ADA) may require your play area to be accessible, please consult with an ADA professional to ensure compliance.

Date	9/29/2026
Sheet #	A.01.1
Drawing Title	Prehistoric Sloth
Approved By / Date:	

Installation Instructions

Prehistoric Sloth

Part # CUS001



ID SCULPTURE

PLAY. CLIMB. EXPLORE.

Specifications: Prehistoric Sloth

- Material: Concrete with Structural Foam
- Approximate Size Assembly: 13'-5" x 7'-0" x 10'-6" Tall
- Approximate Weight: 12,000 lbs
- Maximum Fall Height: 8'-10" (assumes 12" of safety surfacing)
- Age Group: 5-12 Years Old

591 South Boulevard Street
Gunnison, Colorado 81230
info@idsculpture.com
970-641-1747

Required Parts (included):


- Prehistoric Sloth GFRC Sculpture
- Heavy Duty Hoist Rings: 4ct
- "Thunder Junction_Shop Built" Drawing Set

Recommended Equipment (not included):


- 12' Lifting Straps: 4ct
- Lift: Reach Type Forklift or Skid Steer 12,000 lb Capacity
- 5/8" Shackles: 4ct
- 10' Spreader Bar
- Wrench Set / Socket Set

Important Notes:

- *Warning: Installation over a hard surface such as asphalt, or packed earth may result in serious injury or death from falls.*
- *It is the responsibility of the installer to ensure all components are installed in compliance with ASTM F-1487.*
- *All site built footings should be allowed to cure for a minimum of 48 hours prior to installation.*

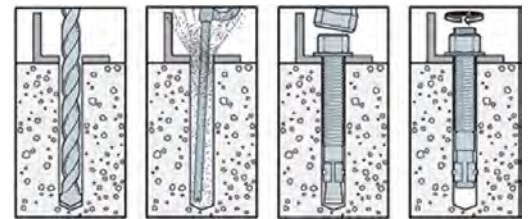

Typical Wedge Anchor Installation

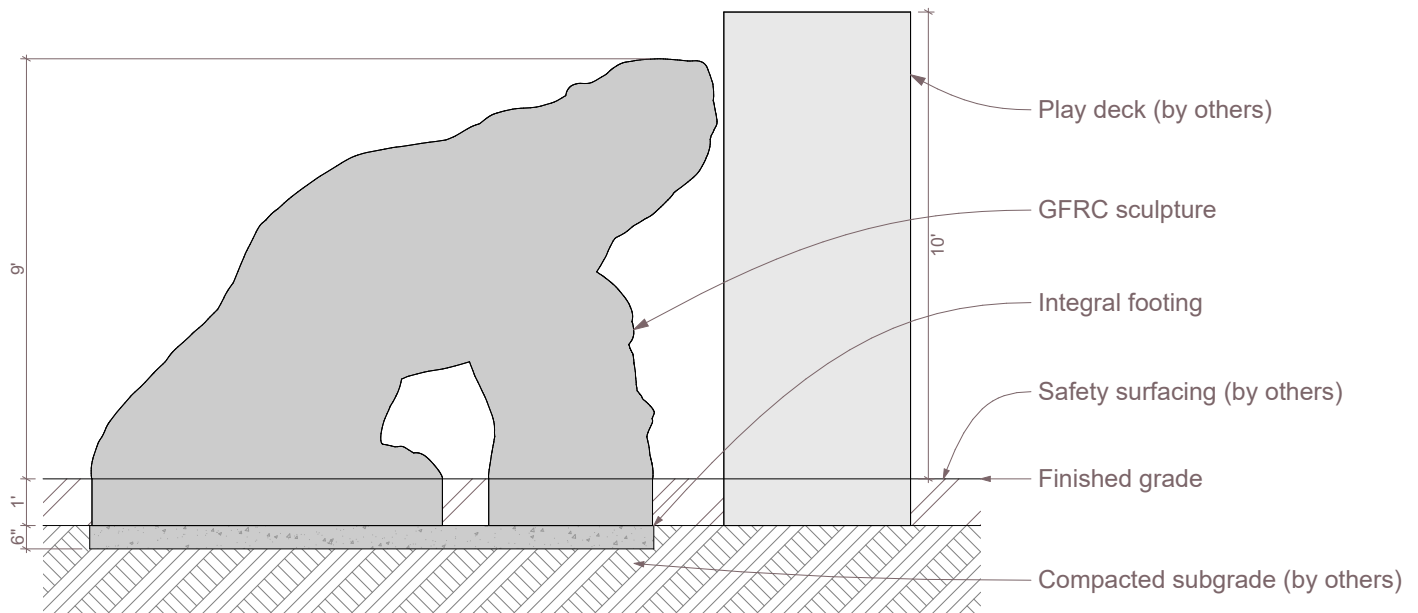

Section

Installation Instructions

Prehistoric Sloth

Part # CUS001





591 South Boulevard Street
Gunnison, Colorado 81230
info@idsculpture.com
970-641-1747

PRE-INSTALL CHECKLIST

Please review prior to ordering and installing ID Sculpture products.

- ☐ 1. Verify that you have the recommended lifting equipment to unload and install your component, as specified by the installation instructions. Please check the installation instructions for the weight of each component and shipping dimensions.
- ☐ 2. Develop a proper plan to access the site and control access prior to opening.
- ☐ 3. Call your local utilities to locate any potential existing below grade equipment?
- ☐ 4. FOR ALL SCULPTURES: Verify you have accounted for adjustments to the footing depth based on your choice of safety surfacing material. Footing depth must be adjusted to compensate for the depth/thickness requirements of the selected safety surfacing (*see diagrams below*). Layout drawings show the uninstalled dimensions of the component. If you require a modification to a standard component, please notify ID Sculpture when placing your order. *Additional charges may apply.*

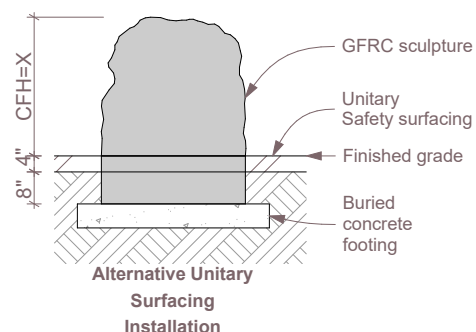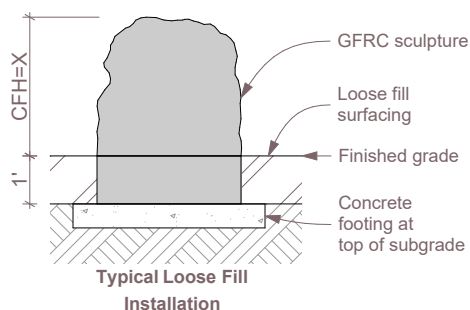

*Critical Fall Height (CFH)

- ☐ 5. Verify that you have installed any required footings prior to the arrival of your sculptures. Please note, footings should be allowed to cure for a minimum of 7 days.

Important Safety Note:

Please install and maintain adequate protective surfacing under and around your equipment. Never let children play on the equipment before protective surfacing is installed. Please consult ASTM F1487 for more information.

Installation Instructions

Prehistoric Sloth


Part # CUS001



Sculpture Installation:

1. Excavate the site below the top of subgrade as per the provided layout drawings.
2. Compact the subgrade beneath the sculpture, level using sand as necessary.
3. Make sure that the heavy duty hoist rings eyes are securely attached to the bolts protruding from the sides of the integral footing. Secure the lifting straps to bolt hangers using the 5/8" shackles.
4. Lift the sculpture using an appropriate reach forklift or crane taking care to equalize the load on straps.
5. Set the sculpture in place and verify layout and all use zones as required by ASTM 1487.
6. Remove heavy duty hoist rings.
7. Backfill so the subgrade is level with the top of the integral footing and compact as necessary.
8. Install resilient surfacing material in accordance with layout guidelines, and ASTM standards.

591 South Boulevard Street
Gunnison, Colorado 81230
info@idsculpture.com
970-641-1747

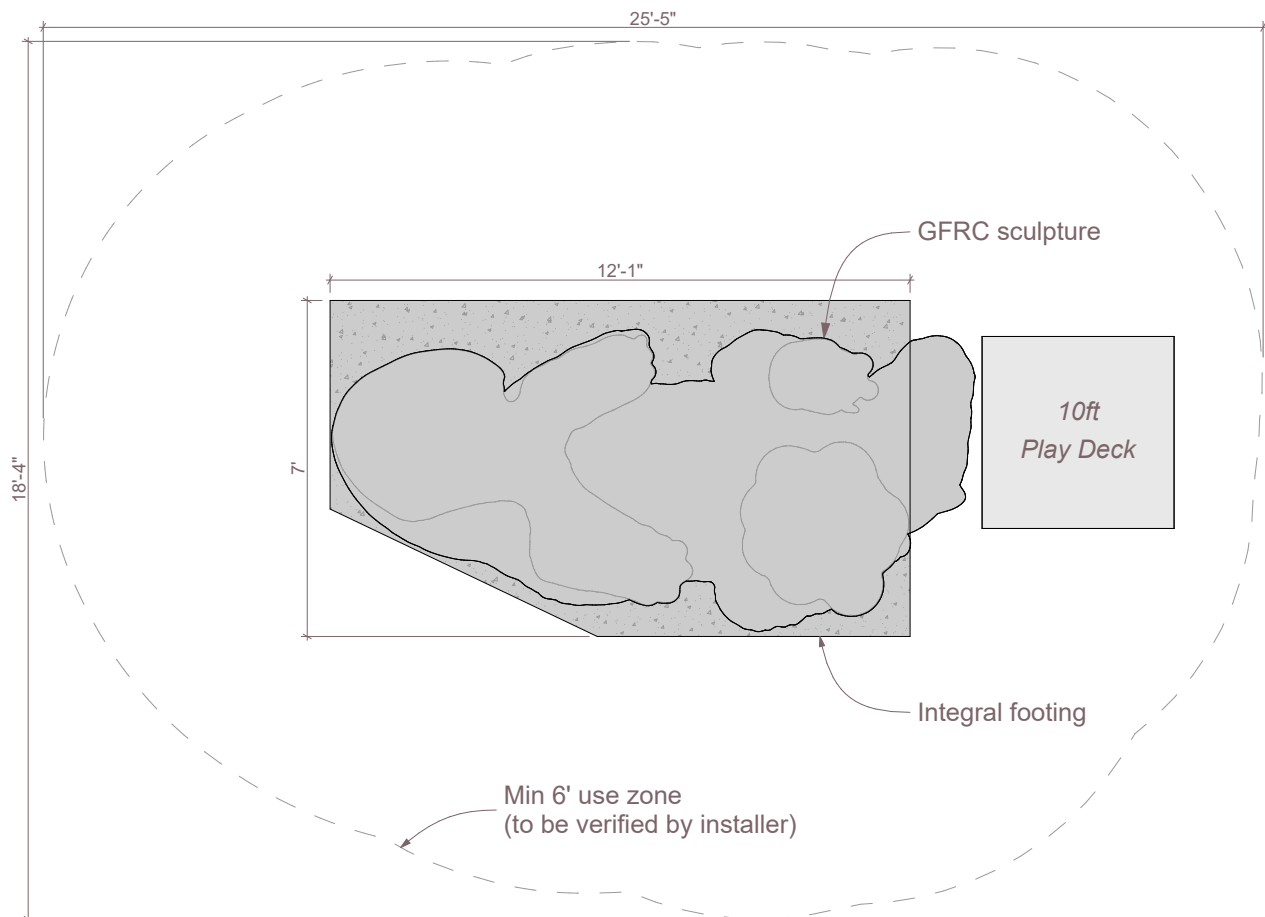

Plan

Installation Instructions

Prehistoric Sloth

Part # CUS001



ID SCULPTURE


PLAY. CLIMB. EXPLORE.

591 South Boulevard Street


Gunnison, Colorado 81230

info@idsculpture.com

970-641-1747

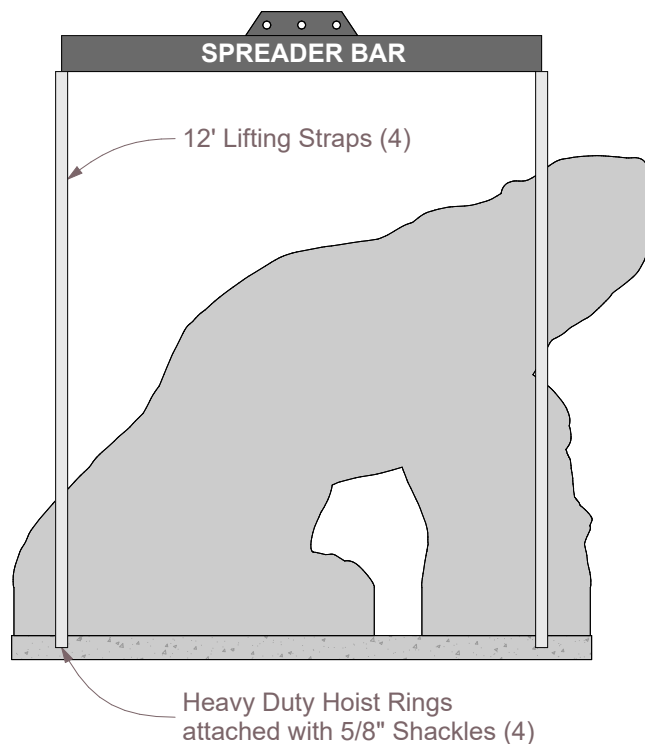

Pick Diagram - Elevation

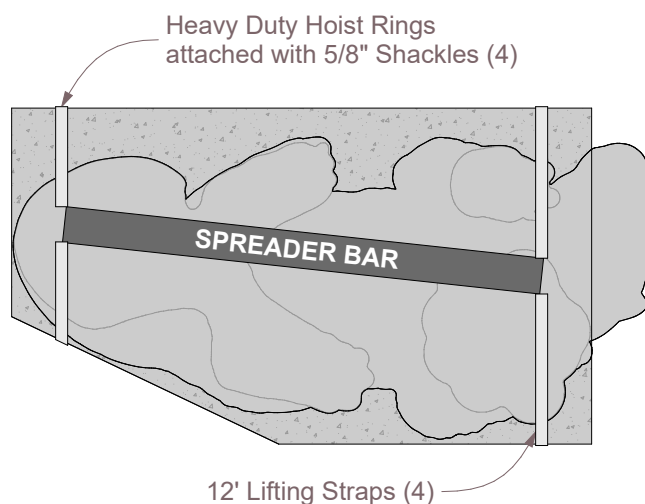

Pick Diagram - Plan